

OZONATED WATER APPLICATION GUIDEBOOK

Advanced Ozone Technologies for Pet Grooming

Easily integrated into your grooming business to reduce unwanted odors, fight infection, and fresh the air.



BENEFITS



Sanitation



Deodorizes



No Chemical
Disinfectant



Pets Friendly

Safer, Faster & Easier



Professional Ozone Spray Bottle

MODEL: EOS7161-P

Ozonated water concentration:

■ Up to 3.0 ppm

Applications:

- Requires only tap water for operation
- General surface sanitation
- Hand sanitation
- Basic pet cleaning



Hand sanitation



Hygienic environment



Surface cleaning



Space Sanitizer System Plus

MODEL: EOS7190-P

Ozone gas concentration:

■ 0.05 - 0.1 ppm

Applications:

- Reduce airborne transmission risk
- Remove odors & unwanted smell
- Air & space sanitation



Odor removal



Risk reduction



WDS3000X

MODEL: EOS7177-PQX

Ozonated water concentration:

■ Up to 2.0 ppm

Applications:

- Washing, sanitizing, deodorizing
- General surface sanitation
- Support multiple shower heads



Wash & sanitize



Fluffy and quick-drying



Intergrettable with washing machine



Reduce odors

Test Reports by Third Party Laboratories



SARS-CoV-2
Rapidly Inactivated



Hand Sanitation
> 99.99%



Surface Sanitation
> 99.99%



Cytotoxicity Test
No harmful

SPECIFICATIONS

Professional Ozone Spray Bottle

OSB



150ml

Application	Surface sanitation
Conc.	3.0 ppm
Working water quality	Clean tap water* ¹
Coverage	Up to 0.6 m ² per spray
Power	DC 5V 1A
Battery	1200 mAh
Dimensions (mm)	Ø53 x H255mm
Weight (Net)	308g

*1. TDS 60 - 200 ppm, hardness < 180 ppm as CaCO₃

Space Sanitizer System Plus

SSS+



Application	Space sanitation
Conc.	0.05 - 0.1 ppm
Working water quality	Pure water
Coverage	Up to 150 m ²
Power	AC 100-240V, 50/60Hz; 32W
Dimensions (mm)	W230 x D127 x H300
Weight (Net)	2.5kg

Water Disinfection System

WDS3000X




Application	General sanitation
Conc.	Up to 2.0 ppm
Working water quality	Clean tap water* ¹
Capacity	Up to 2 faucets
Max. Pressure	< 7 kg/cm ² (100 psi)
Power	AC 100-240V, 50/60Hz; 32W
Dimensions (mm)	W140 x D128.5 x H210.5
Weight (Net)	1.2kg

*1. TDS 60 - 250 ppm, hardness < 180 ppm as CaCO₃

About Us

Since 1988, BES Group has been the global leader of electrolytic technology that converts water to ultra-pure ozone and hydrogen. Products applications include Food Safety, Ice & Beverage, Dentistry, Healthcare, Professional Laundry, Professional Cleaning, Maritime, and Home Sanitation & Wellness. All products and components are tested for high performance, safety, efficacy and reliability with certifications from government agencies and leading 3rd party labs.

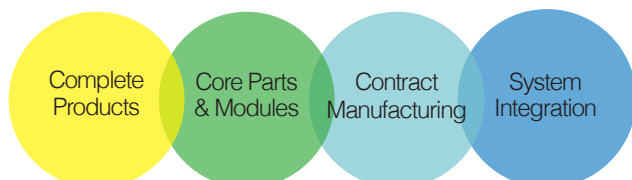

Technologies applied are protected by one or more of the following patents:
US 8,306,914 B2, US 9,757,697 B2, US 9,248,208 B2

North America
BIOSURE North America, LLC.
2020 Babcock Rd., Ste. 25
San Antonio, Texas 78229 USA
www.biosureozone.com

China
Shanghai Zhongte Environmental Technology Co., LTD
Unit 205, 998 Shenbin South Road, Minhang District,
Shanghai, 201106 China
www.biosurepro.com

Malaysia
BIOSURE PROFESSIONAL SDN. BHD.
E2-02-01, Block E2, Sunway Geo Avenue,
Jalan Lagoon Selatan, Sunway South Quay,
47500 Subang Jaya, Selangor D.E., Malaysia.
www.biosureozone.asia

Oceania
BES GROUP (AUST) PTY LTD.
Ground Floor, 737 Burwood Rd,
Hawthorn, VIC 3122 Australia
www.besgroups.com.au

Asia/Headquarters
Biotek Environmental Science Ltd.
5F, 98 Xingde Rd, Sanchung Dist,
New Taipei, 24158 Taiwan
www.besgroups.com

Factory **ISO 9001 Certified**
Yantai United Ozonetec Corporation.
4F, 1 Wuzhishan Rd, ETDZ
Yantai, Shandong 264006 China
www.besgroup.com.cn